

104-102

NESS HIKVISION DS-KIS203 ANALOGUE VIDEO INTERCOM KIT

Easy Install • Quality Audio & Video • Expandable to 3 Rooms



DOOR STATION + MONITOR KIT

Includes

1 x 104-103 Ness Hikvision DS-KB2421-IM
Door Station

1 x 104-104 Ness Hikvision DS-KH2220
Room Station

Requires POW310 Power supply 12VDC 1.5A sold
separately @ \$12.50 +GST

DOOR STATION

- Hands-free video intercom communication
- IR illumination for night-time use
- One-touch calling
- 720P Pinhole colour camera
- Door lock output
- Tough zinc alloy housing
- Vandal-resistant
- IP65 weather resistant
- Install up to 2 door stations per system
(requires additional cabling)

ROOM STATION

- Hands-free video intercom communication
- Supports three indoor stations in the intercom system
- Monitor the door station and an external CCTV camera
- Remote door unlocking
- Wall mounting
- Easy 4 wire installation


104-102

NESS HIKVISION DS-KIS203 ANALOGUE VIDEO INTERCOM KIT

TYPICAL INSTALLATION



OPTIONAL EXPANSION

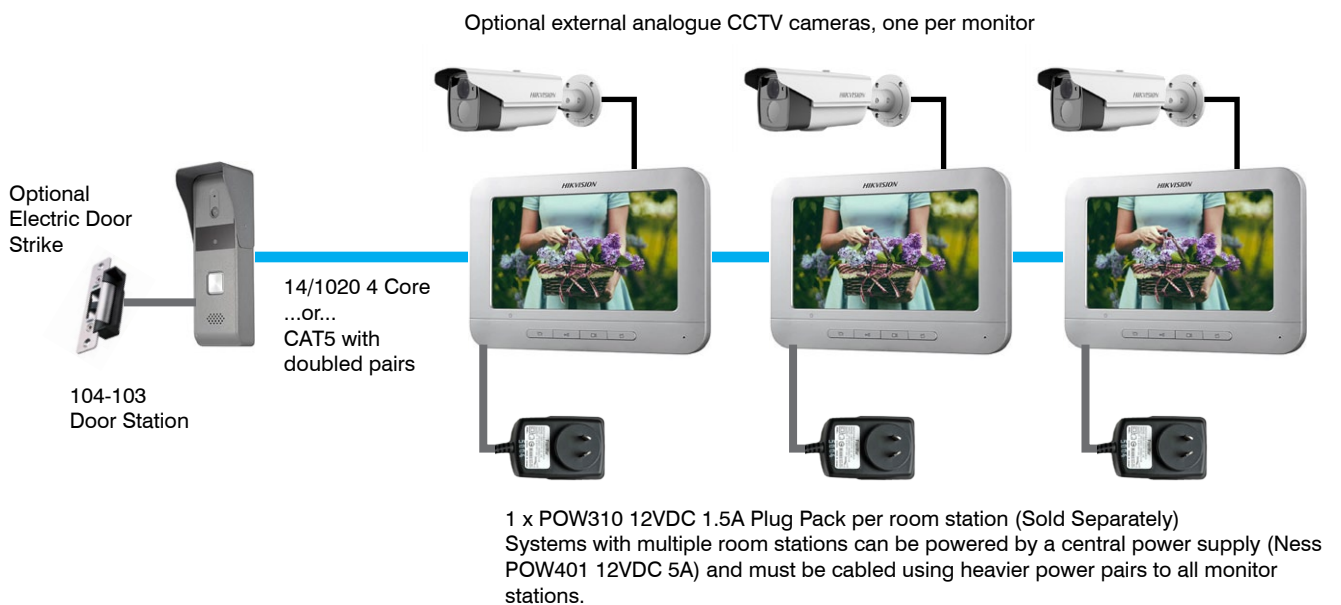

104-104 Room Stations. Maximum 3.

Ordering Information

104-102 Ness Hikvision DS-KIS203 Analogue Video Intercom Kit
104-103 Ness Hikvision DS-KB2421-IM Addition Door Stations
104-104 Ness Hikvision DS-KH2220 Additional Room Station
POW310 Ness 12VDC 1.5A Switchmode plug pack
POW401 Ness 12VDC 5A Switchmode power supply

Model		104-103 Door Station
Video parameters	Camera	1/4" CMOS
	Resolution	720 × 576
	Video frame rate	PAL: 25 fps
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression
Light supplement	Light supplement mode	Photosensitive IR Supplement, IR Range: 2 Meters
Device interfaces	Four-wire interface	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
	I/O output	1 Relay Output
General	Material	Zinc Alloy
	Power consumption	Max. 5W
	Working temperature	-30°C to +70°C
	Working humidity	10% to 90%
	Dimensions (L × W × H)	145 mm × 49.2 mm × 26.45 mm

Model		104-104 Room Station
Display parameters	Display screen	7-Inch Colour TFT LCD
	Display resolution	800 × 480
	Operation method	Physical Button
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression and Echo Cancellation
Device interfaces	Four-wire interface	4 Four-Wire Interfaces 1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding
General	Power supply	12 VDC
	Power consumption	≤5 W
	Working temperature	-10°C to + 55°C
	Working humidity	10% to 90%
	Dimensions (L × W × H)	195.8 mm × 132.8 mm × 18.39 mm



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au