

**DS-KIS702Y-P**  
**Video Intercom Two-Wire Kit**

114-284B



**Key Feature**

- 2-wire digital IP video intercom kit for villa or house, only one call button
- DS-KD8003Y-IME2 x1
- DS-KH6320Y-WTE2 x1
- DS-KAD704Y x1
- 16GB TF card x1

**Specification**

Door station	
Processor	Embedded microcontroller
Operation system	Embedded Linux operation system
Operation mode	One touch key
Door station	
Camera	2MP super definition camera
Resolution	Main stream: 1920 × 1080, (720p configurable); sub stream: 720 × 480
Night vision	Support low light and IR light supplement mode
Backlight compensation	Support
Digital noise reduction	Support
WDR	True WDR
Field of view	Horizontal 146° , vertical 82°
Video Compression Standard	H.264

Stream	Main stream: 1080p@30fps, 720p@30fps (configurable); sub stream: D1
Motion detection	Support
Flash-avoid frequency	50 Hz, 60 Hz
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Loudspeaker, 20 cm sound effect > 80 db
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Audio intercom	Full-duplex two-way audio intercom
Door station	
Debugging port	1
RS-485	1 (1 for Hikvision's sub module communication)
Alarm input	4 (2 exit buttons and 2 door contacts by default)
Lock control	2 (2 relay, max to 30 VDC, 2 A)
TAMPER switch	1
Power interface	Two-wire
Door station	
Working temperature	-40 ° C to 60 ° C (-40 ° F to 140 ° F)

Working humidity	10% to 90%
Dimension	100 mm × 98 mm × 42 mm (3.94" × 7.8" × 1.65")
Installation	Wall mounting
Protection level	IP 65
Button	1
Power input	Powered by KAD704Y or KAD706Y series distributor

<b>Indoor station</b>	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB

<b>Indoor station</b>	
Display screen	7-inch TFT LCD
Display resolution	1024 × 600
Operation method	Capacitive touch

<b>Indoor station</b>	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Volume	Local or software control
Audio compression standard	G.711 U, G.711 A
Audio compression Rate	64 Kbps

<b>Indoor station</b>	
Wired network	Two-wire network
Wireless network	Wi-Fi 802.11b/g/n
Protocol	TCP/IP, SIP, RTSP

<b>Indoor station</b>	
Network interface	Two-wire interface
RS-485	1
Alarm input	8 zones alarm input
Relay output	2 (30 V Max.)
TF card	Support, Max. 128 GB


<b>Indoor station</b>	
Power supply	Powered by KAD704Y or KAD706Y distributor


Power consumption	≤ 4 W
Working temperature	-10 ° C to 50 ° C (14 ° F to 122 ° F)
Working humidity	10% to 90%
Dimensions (W × H × D)	200 mm × 140 mm × 23.6 mm (7.87" × 5.51" × 0.93")

<b>Video Audio Distributor</b>	
Network interface	1 RJ45
Two-wire interface	6 (2 for cascading and 4 for devices)
Signal indicator	6
Power indicator	1
Reset	1

<b>Video Audio Distributor</b>	
Power supply	24 VDC
Power consumption	CH1 to CH3 < 4 W, CH4 < 8 W
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%

## Dimension

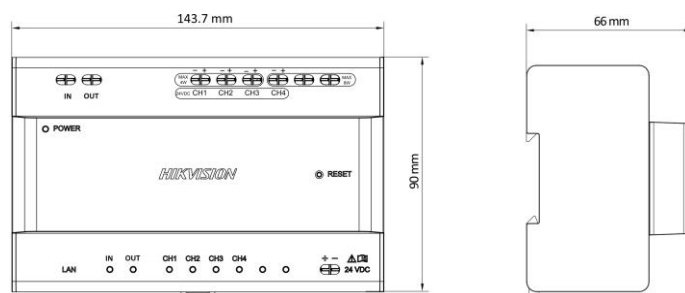

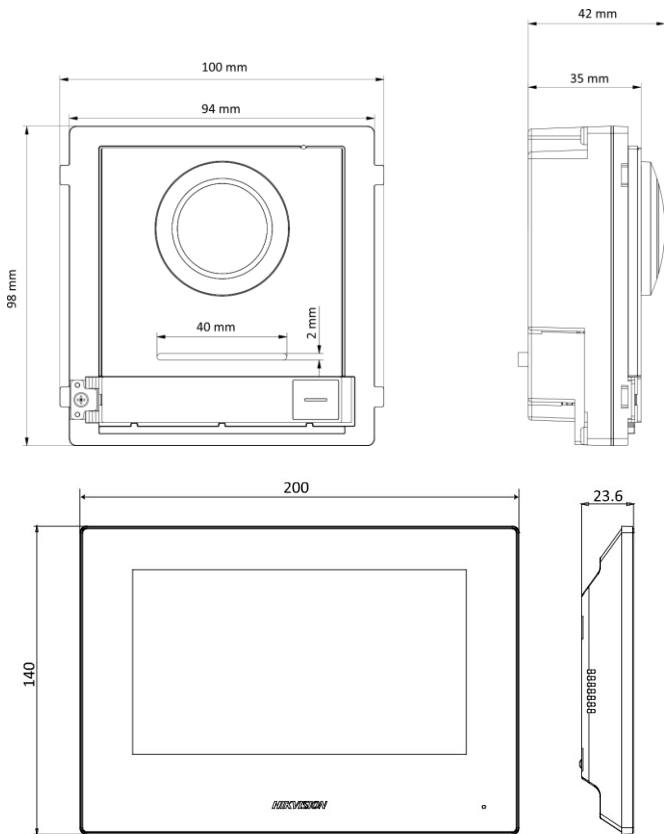

**Accessory**

**Optional**

<b>DS-KD8003-IME2</b> Two wire main unit	<b>DS-KH6320-WTE 2</b> Two wire indoor stations
---	--



<b>DS-KH6320 Y-WTE2</b>	<b>DS-KH6320-WTE 2#EU&amp;UK</b>	<b>DS-KA D704 Villa Two Wire Kit</b>	<b>DS-KD8003-IME2/S Two wire main unit</b>
-------------------------	----------------------------------	--------------------------------------	--



**ORDERING INFORMATION**

114-284B Hikvision DS-KIS702Y 2-Wire Intercom Kit



Innovative Electronic Solutions  
www.ness.com.au



<b>NSW</b> Ph 02 8825 9222 sales@ness.com.au	<b>VIC</b> Ph 03 9875 6400 nessmelb@ness.com.au	<b>QLD</b> Ph 07 3399 4910 nessbris@ness.com.au	<b>WA</b> Ph 08 9328 2511 nessper@ness.com.au	<b>SA</b> Ph 08 8152 0000 adelaide@ness.com.au
---	--	--	--	---